


BSK-40

多功能直播音箱 | 用户使用说明

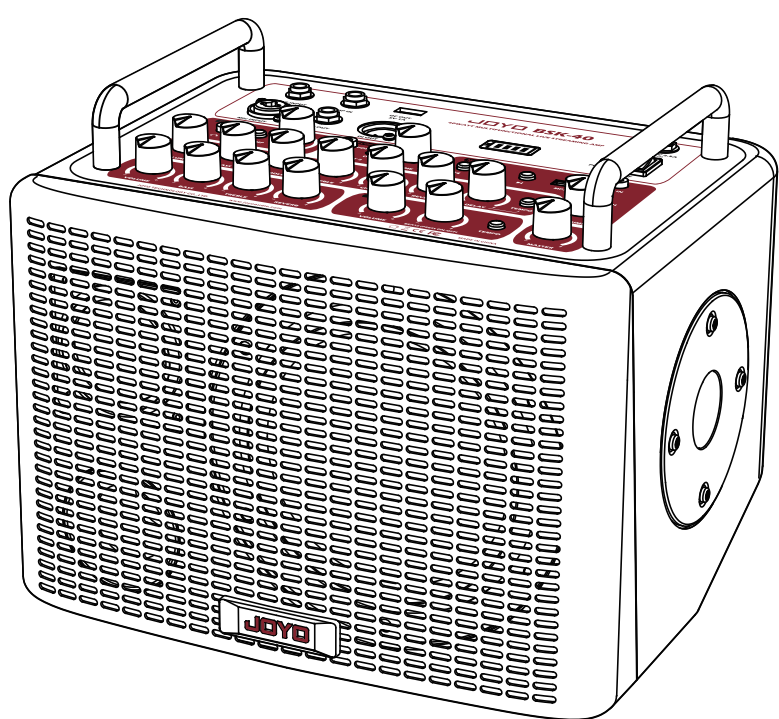

JOYO

JOYO

详细的安全说明书

- 为了您的安全和能更快地熟练使用本产品,使用前请先仔细阅读并理解本说明书中所有的安全与使用说明。
- 为了您以后能更加方便地使用和保养本产品,请妥善保管好本使用说明以供必要时查阅。
- 为了您能更加安全地使用本产品,请遵守在设备上和说明书中所有的警告与注意事项。
- 请使用BSK-40随机附带的交流电源适配器!使用其他适配器可能造成适配器电压与BSK-40输入电压不兼容,导致损坏或其他意外情况发生。
- BSK-40随机附带的适配器已通过相关电磁兼容及安规测试,使用其他适配器我司将不保证其安规性能可以达到或符合您在国家或地区的强制安全认证标准。
- 如果发生电源适配器损坏,在无法获得原厂附带的电源适配器必须另外购买时,请首先保证您要购买的电源适配器之电源极性与最大功率要与本产品所附配的原厂电源保持一致。
- 请在使用完后及时拔下电源插头,以节约能源。
- 请勿将本机放在靠近水或潮湿的地方使用,如浴缸、厕所、洗衣桶、厨房洗菜盆、游泳池旁,防止液体渗入机内,导致机器发生故障无法正常工作或者发生用电危险。
- 避免在周围充满易燃易爆气体的地方使用,如加油站或粉尘场所。
- 如遇本机内置锂电池损坏,请勿擅自采购并更换;本机内置电池已通过严格的安规测试,擅自更换其他途径获得的电池可能会因其自身质量问题导致本产品无法正常工作,或发生爆炸引起火灾。请联系您的零售商更换电池。
- 请勿用酒精等化学溶剂物品清洁本机,避免造成机器表面的损伤,有清洁必要时可用干抹布擦拭。
- 无论出于什么原因,请勿自行拆开机壳,如遇产品故障请联系专业维修人员,或联系您的零售商进行维修。
- 请不要强行拉扯电源线以及其他机器组件避免电源线以及插头损坏。
- 若是在打雷或闪电时,较长时间不使用本产品,务必关闭本机电源开关并拔出电源插头。
- 请勿碰撞、抛掷、震动本机,以免损坏本机。
- 如果设备长期闲置不用,应确保电池处于充满状态,每隔两个月复充一次,否则电池将老化。
- 如本机提示电量低,请及时为本机充电,过度放电以及内部电池长期低电会导致不可逆转的电池容量损失,导致电池损坏。
- 禁止推移在最顶端装有机器而又无保护措施的可移动机架,谨防最顶端的机器跌落给您带来不必要的人身伤害。为保护您的利益,请使用由该制造厂商所生产或推荐的可移动机架、三角架、脚架,固定架、控制台等配件。



1

JOYO

产品特点

- 40瓦2通道多用途户外直播音箱(1路吉他/1路话筒);
- 内置鼓机功能(20种鼓机节奏型);
- 带有数字效果(混响/合唱/延时);
- 两个针对手机录音的(直播)3.5mm接口;
- 带有锂电池,可实现户外使用(满功率可使用约3小时,充电4.5小时);
- 可进行两台音箱级联;
- 带有电量显示屏,能够更精准地监测电池电量使用信息;
- 带斜面支架和支架孔,方便各种使用场景的摆放;
- 带有DI输出接口方便连接调音台及舞台扩声系统,和MUTE功放按键;
- 设有一个Type-C接口,满足OTG数字直播录音需求

包装清单


主机x1
适配器x1
电源线x1
Type-C to Lightning 转接头x1
Type-C to Type-C 直播线x1
说明书x1
尼龙音箱包x1

注意:尼龙音箱包中配有白色珍珠棉,为了避免后期携带过程中损坏机器,请勿丢弃此珍珠棉。

2

JOYO

面板介绍

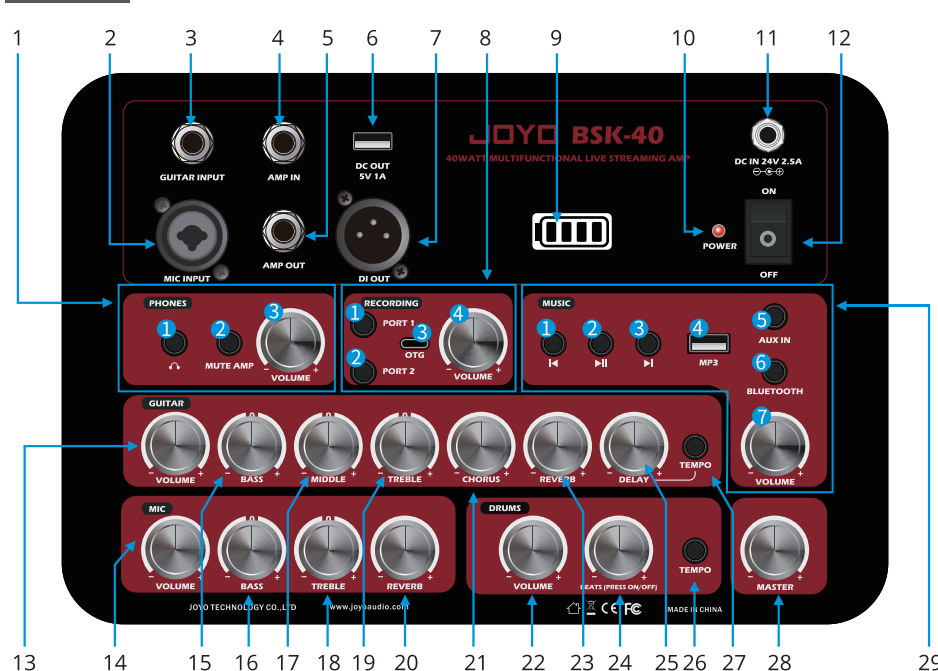


1. PHONES功能模块
①“P”:耳机接口。
②MUTE AMP:功放静音按键。
③VOLUME:耳机音量调节旋钮。
2. 话筒输入接口
3. 吉他输入接口
4. 6.35mm音箱级联输入接口
5. 6.35mm音箱级联输出接口
6. USB DC5V输出接口
7. XLR DI输出接口
8. RECORDING功能模块
①PORT 1:3.5mm手机模拟直播/录音接口
②PORT 2:3.5mm手机模拟直播/录音接口
③OTG直播/录音接口(Type-C)
④VOLUME:直播/录音通道音量调节旋钮。
9. 电池电量显示屏
10. 工作状态指示灯
11. 电源适配器充电接口
12. 电源开关
13. 吉他通道音量调节旋钮
14. 话筒通道音量调节旋钮
15. 吉他通道低频调节旋钮
16. 话筒通道低频调节旋钮
17. 吉他通道中频调节旋钮
18. 话筒通道中频调节旋钮
19. 吉他通道高频调节旋钮
20. 话筒通道混合混合比调节旋钮
21. 吉他通道合唱混合比调节旋钮
22. 鼓机通道音量调节旋钮
23. 吉他通道混响混合比调节旋钮
24. 鼓机通道节奏型选择旋钮
25. 吉他通道延迟混合比调节旋钮
26. 鼓机通道设置按键(tap tempo)
27. 吉他通道延迟时值设置按键(tap tempo)
最大时值:1000ms
28. 总音量调节旋钮
29. MUSIC功能模块
①“”:上一首歌曲
②“”:暂停/播放
③“”:下一首歌曲
④“”:用于连接U盘
⑤AUX IN:辅助输入接口
⑥蓝牙开关
⑦VOLUME:音乐播放音量调节旋钮

3

JOYO

连接示意图

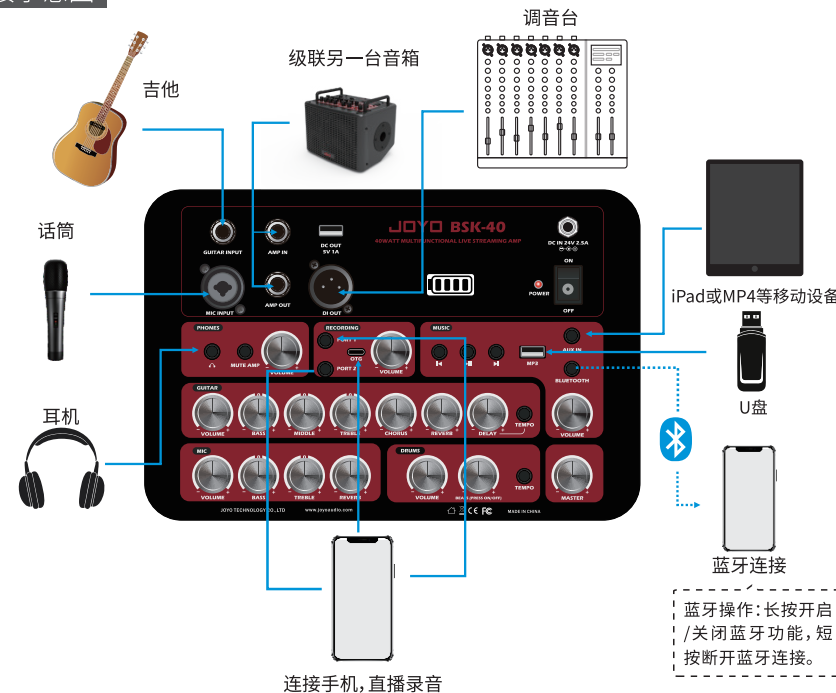

规格参数

AC适配器输入电压: AC100-240V 50-60Hz
AC适配器输出电压: DC 24V/2.5A
电池规格: 18.5V/5.2Ah(锂电池)
USB充电输出: DC 5V/1A
吉他通道输入灵敏度: -11.5dBV 1MΩ
话筒通道输入灵敏度: -41dBV 5.6KΩ
AUX IN输入灵敏度: 0dBV 3.9KΩ
PORT1, PORT2接口输入阻抗: 10KΩ
耳机输出阻抗: 32Ω
AMP IN接口输入阻抗: 11KΩ
AMP OUT接口输出阻抗: 1KΩ
DI OUT接口输出阻抗: 1KΩ
RMS功率: 40W
低音单元: 6.5寸, 4Ω, 50W
高音单元: 2.75寸, 8Ω, 15W
体积: 30x24x24.4cm
重量: 5.7kg

4

JOYO

卓乐产品服务政策

- 一、在正常使用产品过程中,如果产品出现非人为损坏的性能故障,自购买之日起,消费者享有保修服务,保修期为12个月。
- 二、有下列情况之一者,消费者不能享受保修权益:
1、人为损坏; 2、超过保修期; 3、无保修卡及有效发票,但能够证明产品在保修期内的除外;
4、保修卡与产品型号不符,或保修卡被涂改; 5、未按说明书要求使用、维护、保养而造成产品损坏; 6、未经卓乐公司授权,擅自拆卸、维修产品,或浸水、摔坏产品; 7、其他不可抗力造成的损坏。
- 三、卓乐服务信息
消费者服务热线: 0755-29765390
更多信息请访问: www.joyochina.cn



卓乐产品保修卡

产品型号	姓名	SN号码	购机日期
	电话		
	地址		
	发票号码		
	名称(加盖公章)		
	地址		
	电话		

品牌JOYO 名称: 音箱
执行标准: QB/T 4325-2012
制造商: 深圳市卓乐科技有限公司
地址: 广东省深圳市宝安区新安三路
陆氏工业大厦2楼
邮编: 518133
售后服务热线: 0755-29765390

产品合格证


检验结论: 合格
检验员号: QC 01
日期: _____

5

BSK-40

MULTIFUNCTIONAL LIVE STREAMING AMP

Owner's Manual

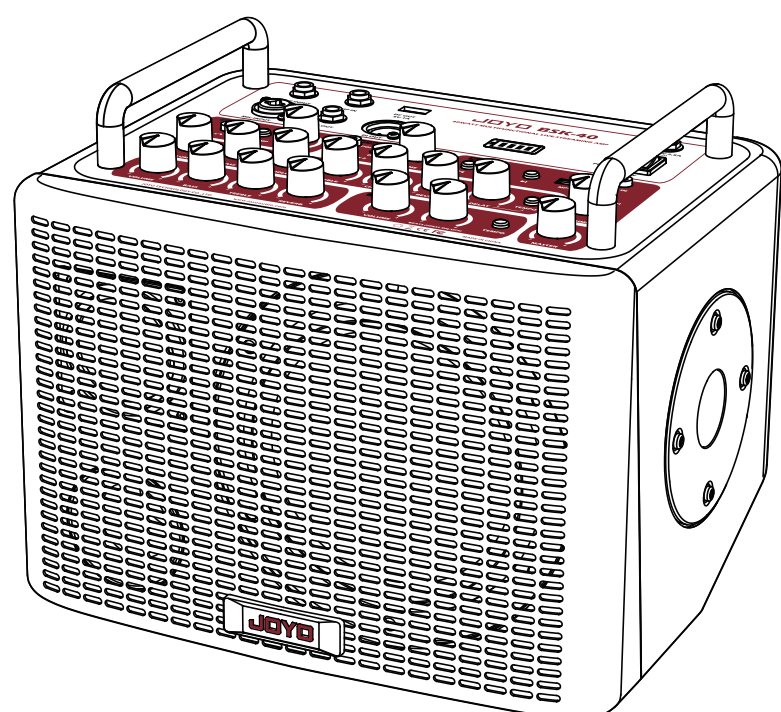

JOYO

JOYO

Detailed safety instructions:

- Use the attached power adapter only. It has passed strict tests and has safety certificates. If use other power adapters, it will increase noise, damage the internal circuits or the built-in battery.
- Do not expose it to any damp areas such as bathtub, toilet, washing-tub, sink, swimming pool. Avoid spill liquid substance into the product, otherwise it will lead to malfunction or electric shock.
- Don't use this product in places where is full of flammable and explosive gas, such as gas station or dusty areas.
- Use BSK-40's attached AC power adapter only! If you choose other adapters, they might not compatible for BSK-40's input voltage damage the unit or worse.
- BSK-40's attached adapter has passed the related electromagnetic compatibility tests and has safety certificates. If you use other power adapters, we're not sure whether they meet your country or region's compulsory safety certification standards.
- If the attached power adapter is broken, and you need to buy a new one, please make sure its polarity of power source and maximum power are the same as the attached power adapter.
- In order to save energy, please turn off the power switch after use.
- Do not use alcohol or other cleaning fluids to clean this product, otherwise it will damage the surface, use a clean dry cloth when necessary.
- Do not open the case for any reason, please contact professional maintenance men if it malfunctions, or contact your local retailer for maintenance.
- Do not pull the power cord or other parts of this product, so as not to damage the power cord and plugs.
- Please turn off this product and unplug it during a thunderstorm, lightning or not in use for a long time.
- Do not collide, throw or vibrate this equipment.
- To protect the built-in battery, please have a full charge if it is not in use for a long time and ensure charge it for every 2 months.
- If it indicates low battery, please charge it in time, as over discharge and low battery will cause irreversible loss to the battery capacity, and damage the battery.
- Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.



1

JOYO

Features

- 40W 2-Channel multi-functional outdoor live streaming amp(1 Guitar Channel/1 Mic Channel)
- Built-in drum machine(20 drum patterns in all)
- Built-in digital effects(REVERB/CHORUS/DELAY)
- 2x3.5mm Jack for smart phone recording(live streaming)
- Lithium battery facilitates outdoor use(can be used for 3hrs continuously once fully charged, a full charge takes 4.5hrs.)
- Can connect to 2 amps in series.
- With precise power indication, the LCD screen displays how much power is left.
- With support bracket and support hole, suitable for different venues.
- DI Output Jack(easy to connect to the mixer or PA system)and MUTE button
- USB OTG Jack for live streaming, with a Type-C Jack

Package contents


- BSK-40×1
- Power adapter×1
- Power cable×1
- Type-C to Lightning Adapter×1
- Type-C to Type-C USB cable×1
- Owner's manual×1
- Nylon guitar amp carry bag×1

Note: There is anti-collision EPE foam in the bag,pls don't discard it.

2

JOYO

Panel

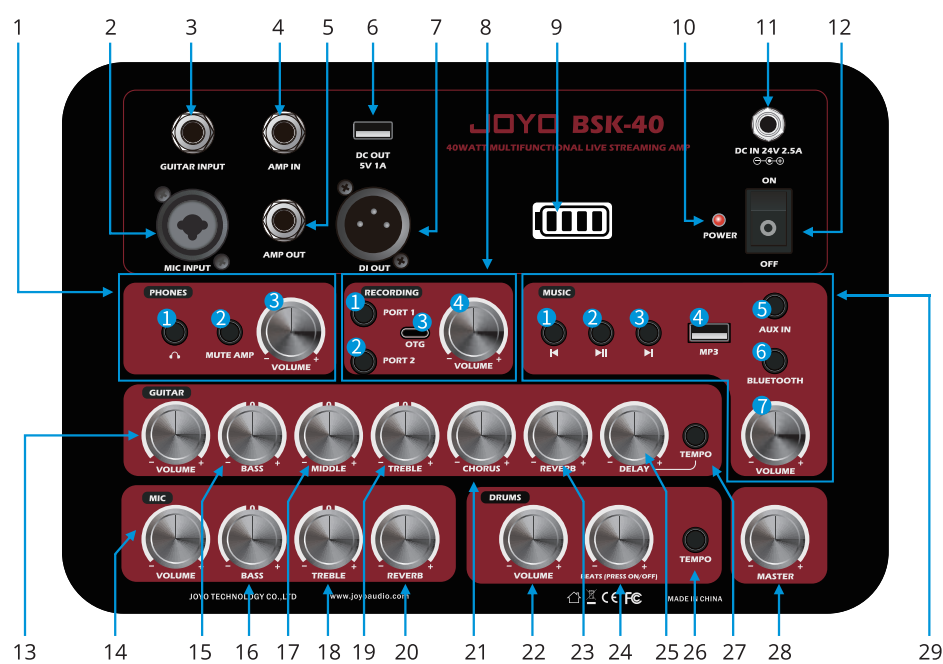


- PHONES Function module
 - Headphone Jack
 - Mute amp: amplifier's Mute button
 - VOLUME: for adjusting headphones' VOLUME
- MIC Input Jack
- Guitar Input Jack
- 6.35mm amp connection in series Input Jack
- 6.35mm amp connection in series Output Jack
- USB DC5V Output Jack
- XLR DI Output Jack
- RECORDING function module
 - PORT 1: 3.5mm smart phone live streaming/recording Jack
 - PORT 2: 3.5mm smart phone live streaming/recording Jack
 - OTG live streaming/recording Jack(Type-C)
 - VOLUME: for adjusting the VOLUME for live streaming/recording Channel
- Battery indicator
- Working status indicator
- Power adapter charging port
- Power switch
- Guitar Channel Volume Control knob
- Mic Channel Volume Control knob
- Guitar Channel Bass Control knob
- Mic Channel Bass Control knob
- Guitar Channel MIDDLE Control knob

3

JOYO

- Mic Channel Treble Control knob
- Guitar Channel Treble Control knob
- Mic Channel REVERB Mix Ratio Control Knob
- Guitar Channel CHORUS Mix Ratio Control Knob
- Drum machine Channel Volume Control Knob
- Guitar Channel REVERB Mix Ratio Control Knob
- Drum machine Channel drum pattern selection Knob
- Guitar Channel DELAY Mix Ratio Control Knob
- Drum machine Channel TAP TEMPO button
- Guitar Channel DELAY TAP TEMPO button (1000ms max)
- Master Volume Control Knob
- MUSIC function module
 - Previous
 - Pause/Play
 - Next
 - MPS: for connecting to the USB drive
 - AUX IN: AUX IN Jack
 - Bluetooth switch
 - VOLUME knob: for adjusting the VOLUME of music playing

Connection diagrams

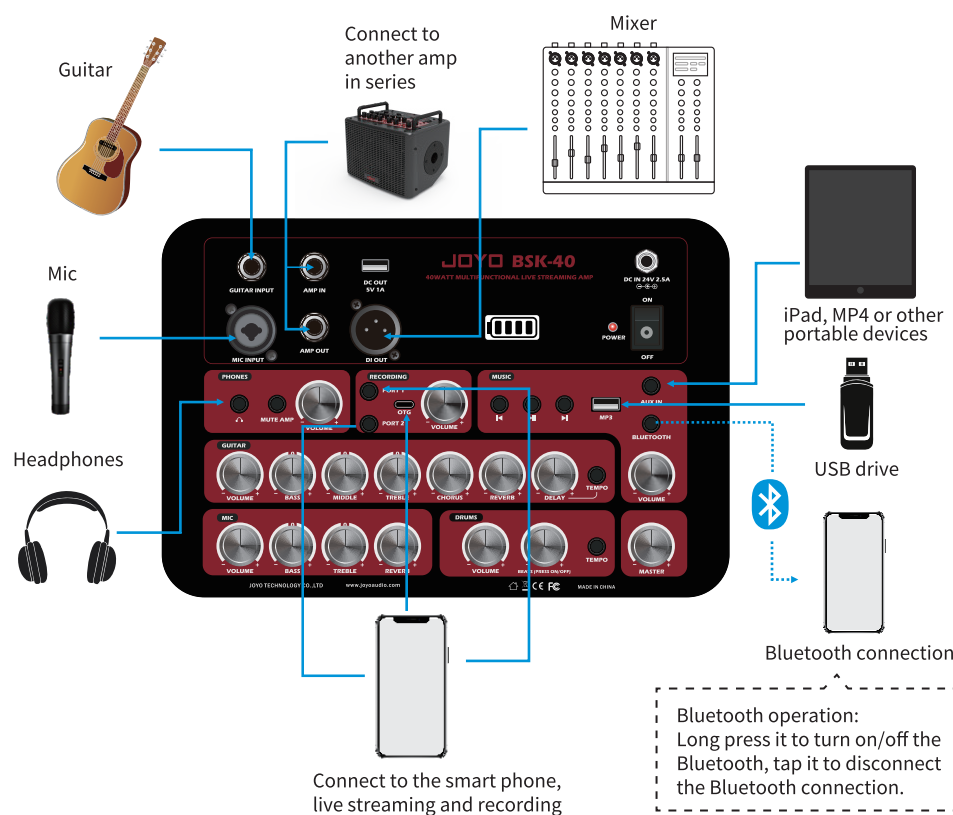

Connect to the smart phone, live streaming and recording

Bluetooth operation:
Long press it to turn on/off the Bluetooth, tap it to disconnect the Bluetooth connection.

4

JOYO

Specifications

- AC adapter input voltage: AC100-240V 50-60Hz
- AC adapter output voltage: DC 24V/2.5A
- Battery's specification: 18.5V/5.2Ah(lithium battery)
- USB Charging Output: DC 5V/1A
- Guitar Channel Input Sensitivity: -11.5dBV 1MΩ
- Mic Channel Input Sensitivity: -41dBV 5.6KΩ
- AUX IN Sensitivity: 0dBV 3.9KΩ
- PORT 1, POR 2 Input Impedance: 10KΩ
- Headphone Out Impedance: 32Ω
- AMP IN Impedance: 11KΩ
- AMP OUT Impedance: 1KΩ
- DI OUT Impedance: 1KΩ
- RMS: 40W
- Bass unit: 6.5 inches, 4Ω, 50W
- Treble unit: 2.75 inches, 8Ω, 15W
- Dimensions: 30x24x24.4cm
- Weight: 5.7kg

JOYOTECHNOLOGY CO., LTD

Address: 2/F, Lushi Industry Building, 28th District, Bao'an, Shenzhen, 518101 China.
www.joyoaudio.com Email:info@joyoaudio.com Tel: 0086-755-29765381

5