

## POWER

The Aqua Puss can be powered by a single 9V battery or with a Dunlop ECB003 external DC power supply. The power input is a 5.5mm x 2.1mm jack with the positive voltage on the outer sleeve. Using an external power supply will disconnect the battery. Disconnect the input jack to preserve battery life when not in use. The pedal will lock into bypass mode when it is time to change the battery. It also includes power protection circuitry to prevent damage from AC power supplies.

## SPECIFICATIONS

INPUT IMPEDANCE .....	> 300k $\Omega$
OUTPUT IMPEDANCE .....	< 1k $\Omega$
NOMINAL INPUT .....	-20dBV
SIGNAL TO NOISE RATIO* .....	> 96dB
NOISE REDUCTION RATIO .....	2:1
DELAY DISTORTION** .....	$\leq$ 1%
DELAY RANGE .....	20ms to 300ms
DIMENSIONS .....	4-25/32" x 3-3/4" x 1-3/4"
WEIGHT.....	14oz.
BYPASS.....	True Hardwire Relay
CURRENT DRAW.....	16mA
POWER SUPPLY .....	9-VOLT BATTERY, DUNLOP ECB03, DC BRICK, OR CAE MC-403.

\*A-weighted,  $V_{ref} = 1V_{rms}$

\*\*500Hz, -20dBV input

Features: heavy-duty footswitch with quiet relay-based true bypass, blue LED indicator, 5.5mm x 2.1mm power jack with AC protection, easy access non-detachable battery door, super-duty 0.09" aluminum anodized chassis, high grade components, great tone and cool name.



LIVE TO PLAY LIVE®

JIMDUNLOP.COM wayhuge.com

DUNLOP MANUFACTURING, INC. P.O. BOX 846 BENICIA, CA 94510 U.S.A.  
TEL: 1-707-745-2722 FAX: 1-707-745-2658 WWW.JIMDUNLOP.COM



**AQUA-PUSS**  
MK II

**WAY HUGE**  
ELECTRONICS

**WHE701**  
**Aqua Puss**  
**instruction manual**

9250300259

## The legendary Way Huge Aqua-Puss has returned!

The Aqua-Puss MkII is now making its triumphant return, ready to bathe a tone-thirsty world in gorgeously smooth delay. It first appeared on Earth in 1996, an analog delay pedal so warm and vibey that guitarists found they just couldn't live without it.

The Aqua-Puss delivers all the spooky mystery of vintage analog delay and tape-based echo, with none of the hassle of creaky, ancient gear. One twist of the Delay knob takes you from a tight 20ms delay to a cavernous 300ms. The Feedback control regulates delay duration and intensity. But watch out. Extreme settings can send the Aqua-Puss MkII into self-oscillating psycho-freak-out mode! Meanwhile the Blend knob lets you set a balance between dry and delayed signal—from mild to wild.

The Aqua-Puss integrates easily into any guitar rig. Ideal placement in the signal chain would be between your guitar and amp, and before any distortion unit(s). Run a cable from your guitar to the In jack of the Aqua-Puss and run another cable from the Out jack to your distortion unit or amp and you are set.

### Sample Settings

#### SLAP-A-BILLY



DELAY - 10:30  
FEEDBACK - 7:30  
BLEND - 10 O'CLOCK

#### CLASSIC PLEX



DELAY - 5 O'CLOCK  
FEEDBACK - 11:30  
BLEND - 8:30

#### PSYCHO-FREAK-OUT




DELAY - ROTATE BACK AND  
FORTH FROM 7 TO 5 O'CLOCK  
FEEDBACK - 5 O'CLOCK  
BLEND - 5 O'CLOCK

DELAY - ADJUSTS WARM  
ORGANIC DELAY TIMES BETWEEN  
20MS AND 300MS

FEEDBACK -  
SETS THE NUMBER OF  
ECHO REPEATS

BLEND -  
REGULATES RATIO OF DRY TO  
DELAYED SIGNAL

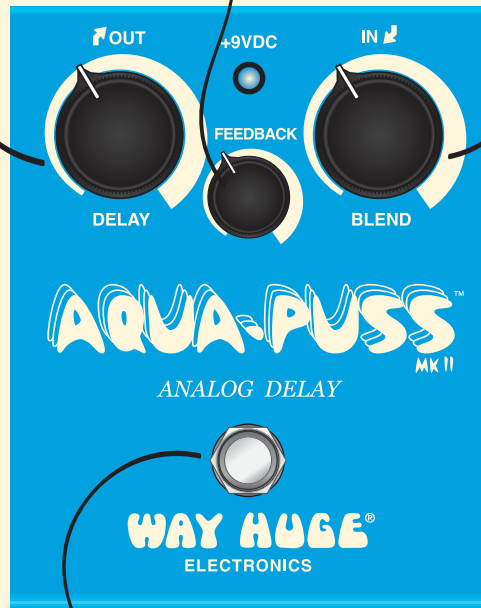

FOOTSWITCH - TOGGLES THE  
EFFECT ON/TRUE BYPASS  
(BLUE LED INDICATES EFFECT IS ON)